

# PE423641

## Document category: Product Specification

UltraCMOS® SP4T RF Switch, 50–3000 MHz



## Features

- AEC-Q100 Grade 2 certified
- Supports operating temperature up to +105°C
- HaRP™ technology enhancements provide excellent linearity:
  - Low harmonics of  $2f_o = -83$  dBc and  $3f_o = -77$  dBc @ +35 dBm
  - IMD3 of  $-111$  dBm @ WCDMA band 1
  - IIP3 of 68 dBm
- Low insertion loss:
  - 0.50 dB @ 1000 MHz
  - 0.65 dB @ 2200 MHz
- High isolation:
  - 32 dB @ 1000 MHz
  - 25 dB @ 2200 MHz
- High ESD performance:
  - 2000V HBM on all pins
  - 100V MM on all pins
  - 1000V CDM on all pins
- Integrated decoder for 2-pin control:
  - Accepts 1.8V and 2.75V levels

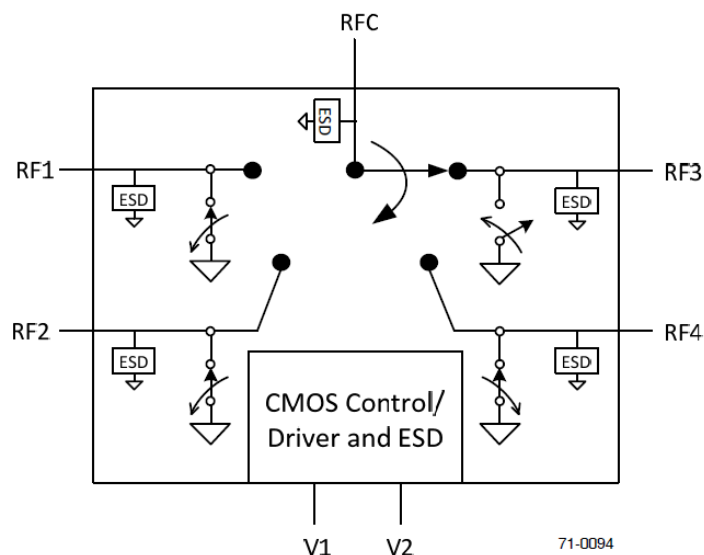


Figure 1. PE423641 functional block diagram


## Product description

The PE423641 is a HaRP™ technology-enhanced reflective SP4T RF switch. It has received AEC-Q100 Grade 2 certification and meets the quality and performance standards that makes it suitable for use in harsh automotive environments. It is designed to cover a wide range of wireless applications from 50 MHz through 3 GHz, such as cellular antenna band switching, automotive infotainment, and traffic safety applications. No blocking capacitors are required if DC voltage is not present on the RF ports.


The PE423641 is manufactured using the pSemi UltraCMOS® process, a patented variation of silicon-on-insulator (SOI) technology on a sapphire substrate, offering excellent RF performance.

pSemi's HaRP™ technology enhancements deliver high linearity and excellent harmonics performance. It is an innovative feature of the UltraCMOS process, offering the performance of GaAs with the economy and integration of conventional CMOS.

## Absolute maximum ratings

 Exceeding the absolute maximum ratings listed in Table 1 could cause permanent damage. Restrict operation to the limits in Table 2. Operation between the operating range maximum and the absolute maximum for extended periods could reduce reliability.

## ESD precautions


 When handling this UltraCMOS device, observe the same precautions as with any other ESD-sensitive devices. Although this device contains circuitry to protect it from damage due to ESD, do not exceed the rating listed in Table 1.

## Latch-up immunity

Unlike conventional CMOS devices, UltraCMOS devices are immune to latch-up.

Table 1. PE423641 absolute maximum ratings

Parameter or condition	Symbol	Min	Max	Unit
Supply voltage	$V_{DD}$	-0.3	3.7	V
Digital input voltage ( $V_1$ , $V_2$ )	$V_I$	-0.3	3.7	V
RF input power, maximum	$P_{MAX,ABS}$	-	+37	dBm
Storage temperature range	$T_{ST}$	-65	+150	°C
ESD voltage HBM <sup>(1)</sup> , all pins	$V_{ESD,HBM}$	-	2000	V
ESD voltage MM <sup>(2)</sup> , all pins	$V_{ESD,MM}$	-	100	V
ESD voltage CDM <sup>(3)</sup> , all pins	$V_{ESD,CDM}$	-	1000	V


-  1. Human Body Model (MIL-STD-883 Method 3015)  
2. Machine Model (JEDEC JESD22-A115)  
3. Charged Device Model (JEDEC JESD22-C101)

## Recommended operating conditions

Table 2 lists the PE423641 recommending operating conditions. Do not operate devices outside the operating conditions listed below.

Table 2. PE423641 operating conditions

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	V <sub>DD</sub>	2.65	2.75	3.3	V
Supply current (V <sub>DD</sub> = 2.75V, +25 °C only)	I <sub>DD</sub>	-	13	50	μA
Digital input high (V1, V2)	V <sub>IH</sub>	1.4	-	V <sub>DD</sub>	V
Digital input low (V1, V2)	V <sub>IL</sub>	0	-	0.4	V
RF input power, CW <sup>(*)</sup>	P <sub>MAX,CW</sub>	-	-	+35	dBm
Operating temperature range	T <sub>OP</sub>	-40	+25	+105	°C

 \* 100% duty cycle, all bands, 50Ω.


## Electrical specifications

Table 3 lists the PE423641 key electrical specifications at +25 °C and  $V_{DD} = 2.75V$  ( $Z_S = Z_L = 50\Omega$ ), unless otherwise specified.

Table 3. PE423641 electrical specifications

Parameter	Path	Condition	Min	Typ	Max	Unit
Operational frequency	–	–	50	–	3000	MHz
Insertion loss (symmetric ports)	RFC–RFx	50–1000 MHz	–	0.50	0.60	dB
		1000–2200 MHz	–	0.65	0.75	dB
		2200–2700 MHz	–	0.80	0.95	dB
		2700–3000 MHz	–	0.95	1.15	dB
Isolation	RFC–RFx	50–1000 MHz	30	32	–	dB
		1000–2200 MHz	23	25	–	dB
		2200–2700 MHz	21	23	–	dB
		2700–3000 MHz	20	22	–	dB
Return loss (active ports)	RFC–RFx	50–1000 MHz	–	24	–	dB
		1000–2200 MHz	–	19	–	dB
		2200–2700 MHz	–	16	–	dB
		2700–3000 MHz	–	14	–	dB
Return loss (common ports)	RFC–RFx	50–1000 MHz	–	23	–	dB
		1000–2200 MHz	–	16	–	dB
		2200–2700 MHz	–	14	–	dB
		2700–3000 MHz	–	13	–	dB
Second harmonic	RFx	+35 dBm output power, 850/900 MHz	–	-83	-80	dBc
		+33 dBm output power, 1800/1900 MHz	–	-85	-78	dBc
Third harmonic	RFx	+35 dBm output power, 850/900 MHz	–	-77	-73.5	dBc
		+33 dBm output power, 1800/1900 MHz	–	-78	-72.5	dBc
IMD3	–	RF Measured at 2.14 GHz at ANT port, input +20 dBm CW signal at 1.95 GHz and -15 dBm CW signal at 1.76 GHz	–	-111	–	dBm
Input IP2	RFC–RFx	50–3000 MHz	–	115	–	dBm
Input IP3	RFC–RFx	50–3000 MHz	–	68	–	dBm

Parameter	Path	Condition	Min	Typ	Max	Unit
Input 0.1 dB compression point <sup>(1)</sup>	RFC–RFx	50–3000 MHz	–	37	–	dBm
Switching time <sup>(2)</sup>	–	50% CTRL to 90% or 10% RF	–	1	2	µs

- 
1. The input 0.1 dB compression point is a linearity figure of merit. For the operating RF input power (50Ω), see [Table 2](#).


2. The PE423641 has a maximum 25 kHz switching frequency. Switching frequency describes the time duration between switching events. Switching time is the time duration between the point the control signal reaches 50% of the final value and the point the output signal reaches within 10% or 90% of its target value.

Table 4 lists the PE423641 key electrical specifications at -40 °C to +105 °C and  $V_{DD} = 2.75V$  ( $Z_S = Z_L = 50\Omega$ ), unless otherwise specified.

Table 4. PE423641 electrical specifications

Parameter	Path	Condition	Min	Typ	Max	Unit
Operational frequency	–	–	50	–	3000	MHz
Insertion loss (symmetric ports)	RFC–RFx	50–1000 MHz	–	0.50	0.75	dB
		1000–2200 MHz	–	0.65	0.90	dB
		2200–2700 MHz	–	0.80	1.10	dB
		2700–3000 MHz	–	0.95	1.30	dB
Isolation	RFC–RFx	50–1000 MHz	30	32	–	dB
		1000–2200 MHz	23	25	–	dB
		2200–2700 MHz	21	23	–	dB
		2700–3000 MHz	20	22	–	dB
Return loss (active ports)	RFC–RFx	50–1000 MHz	–	24	–	dB
		1000–2200 MHz	–	19	–	dB
		2200–2700 MHz	–	16	–	dB
		2700–3000 MHz	–	14	–	dB
Return loss (common ports)	RFC–RFx	50–1000 MHz	–	23	–	dB
		1000–2200 MHz	–	16	–	dB
		2200–2700 MHz	–	14	–	dB
		2700–3000 MHz	–	13	–	dB
Second harmonic	RFx	+35 dBm output power, 850/900 MHz	–	-83	-76	dBc
		+33 dBm output power, 1800/1900 MHz	–	-85	-74	dBc
Third harmonic	RFx	+35 dBm output power, 850/900 MHz	–	-77	-69.5	dBc
		+33 dBm output power, 1800/1900 MHz	–	-78	-68.5	dBc
IMD3	–	RF Measured at 2.14 GHz at ANT port, input +20 dBm CW signal at 1.95 GHz and -15 dBm CW signal at 1.76 GHz	–	-111	–	dBm
Input IP2	RFC–RFx	50–3000 MHz	–	115	–	dBm
Input IP3	RFC–RFx	50–3000 MHz	–	68	–	dBm

Parameter	Path	Condition	Min	Typ	Max	Unit
Input 0.1 dB compression point <sup>(1)</sup>	RFC–RFx	50–3000 MHz	–	37	–	dBm
Switching time <sup>(2)</sup>	–	50% CTRL to 90% or 10% RF	–	1	2	µs

- 
1. The input 0.1 dB compression point is a linearity figure of merit. For the operating RF input power (50Ω), see [Table 2](#).

2. The PE423641 has a maximum 25 kHz switching frequency. Switching frequency describes the time duration between switching events. Switching time is the time duration between the point the control signal reaches 50% of the final value and the point the output signal reaches within 10% or 90% of its target value.

## SP4T control logic

Table 5. PE423641 truth table.

Path	V2	V1
RFC-RF1	0	0
RFC-RF2	1	0
RFC-RF3	0	1
RFC-RF4	1	1



## Typical performance data

Figure 2–Figure 9 show the typical performance data at +25 °C and  $V_{DD} = 2.75V$ , unless otherwise specified.

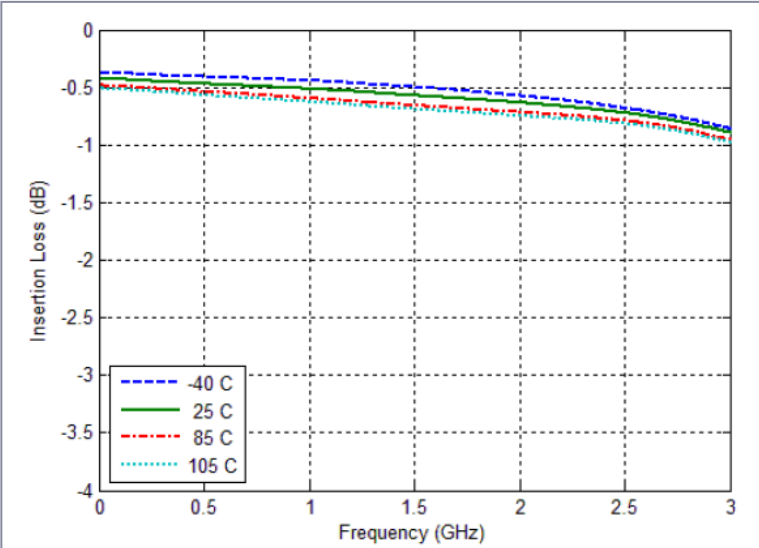


Figure 2. Insertion loss vs. temperature (RFC-RFx)

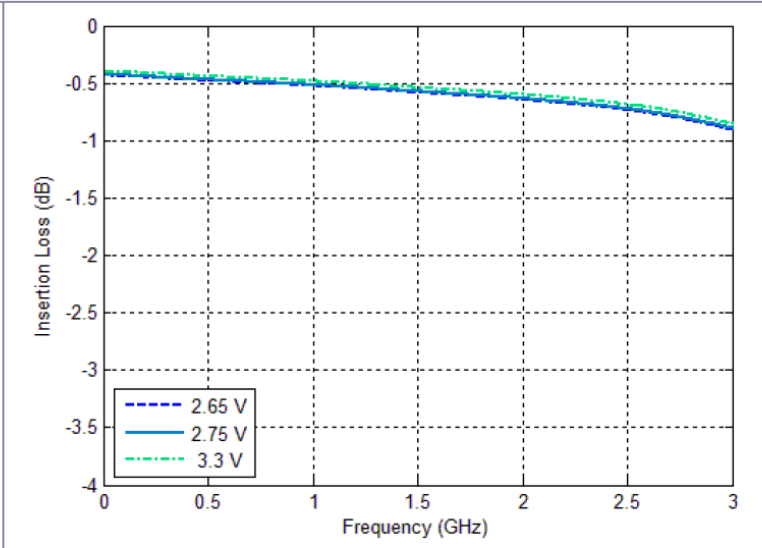


Figure 3. Insertion loss vs.  $V_{DD}$  (RFC-RFx)

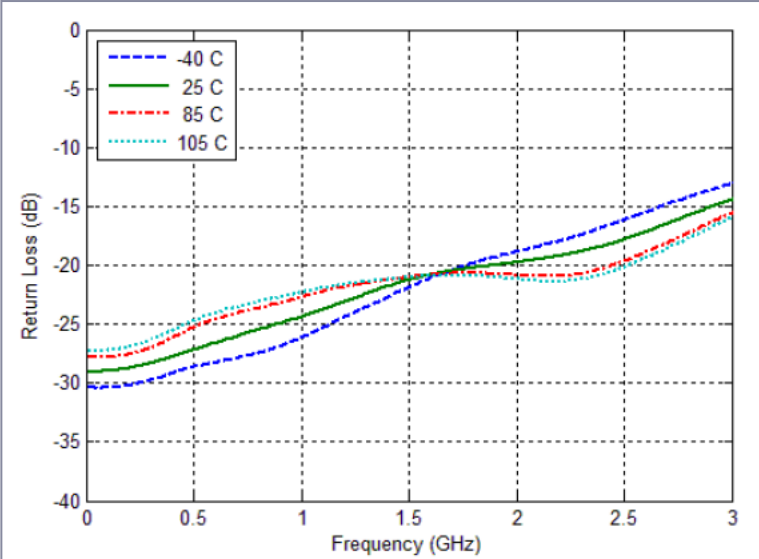


Figure 4. Return loss vs. temperature (active port)

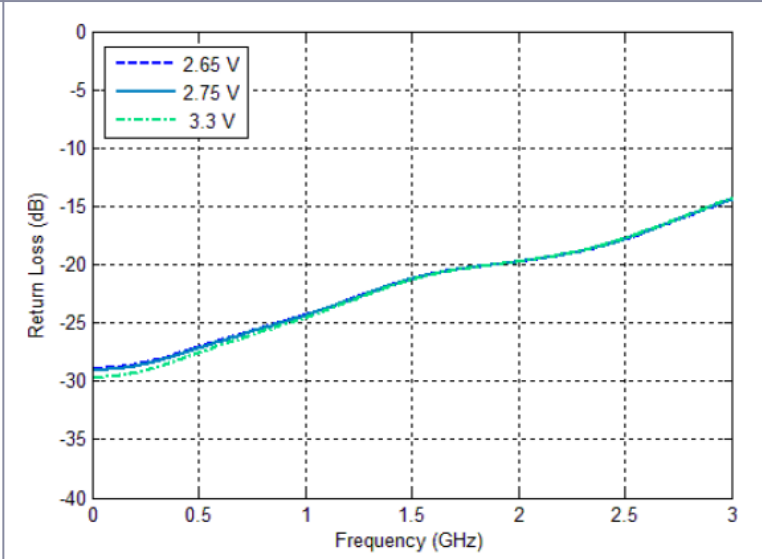


Figure 5. Return loss vs.  $V_{DD}$  (active port)

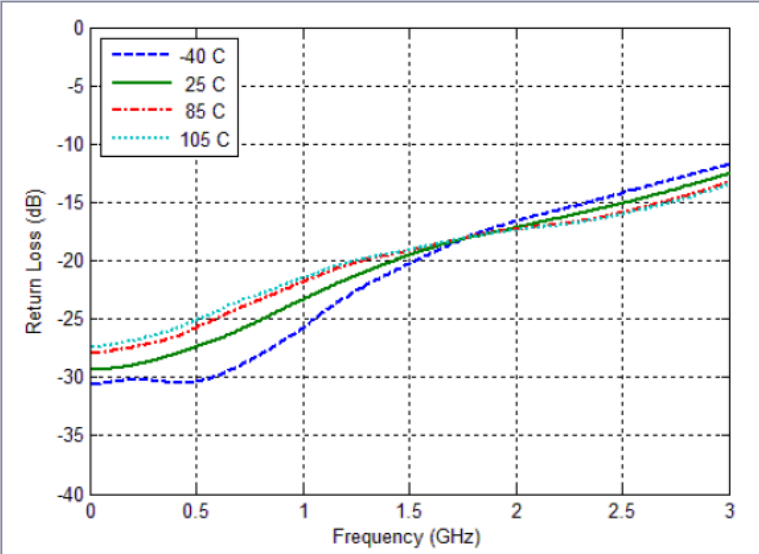


Figure 6. Return loss vs. temperature (common port)

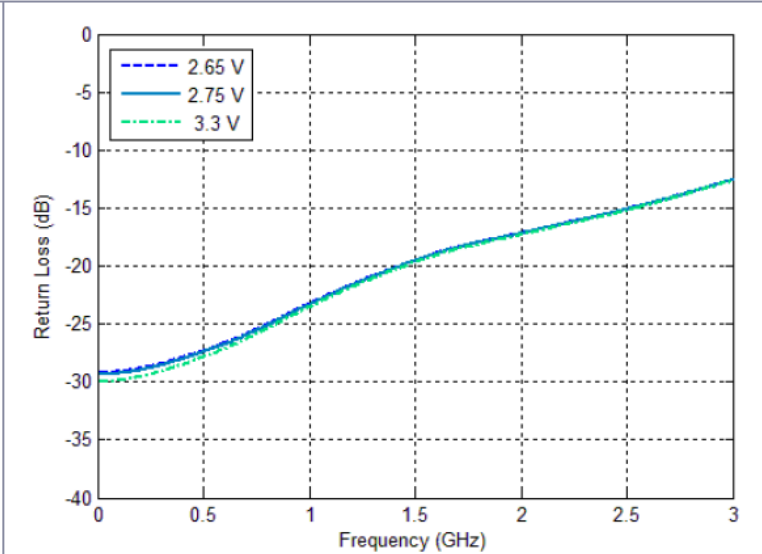


Figure 7. Return loss vs.  $V_{DD}$  (common port)

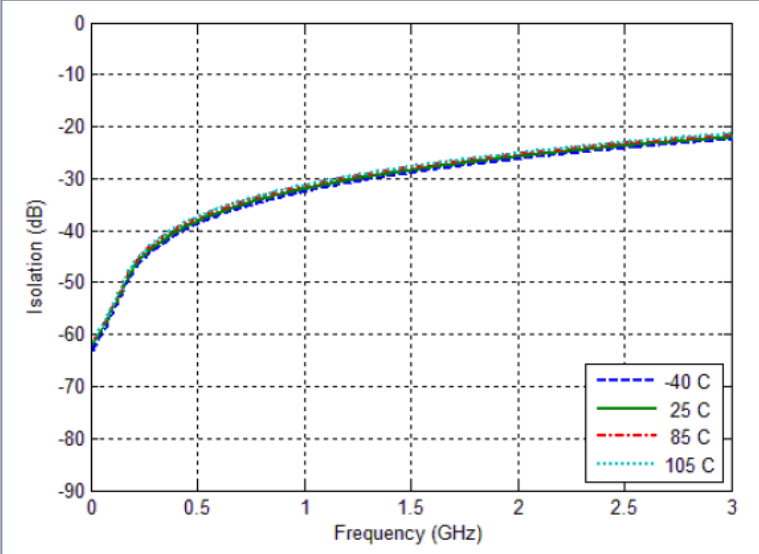


Figure 8. Isolation vs. temperature (RFC-RFx)


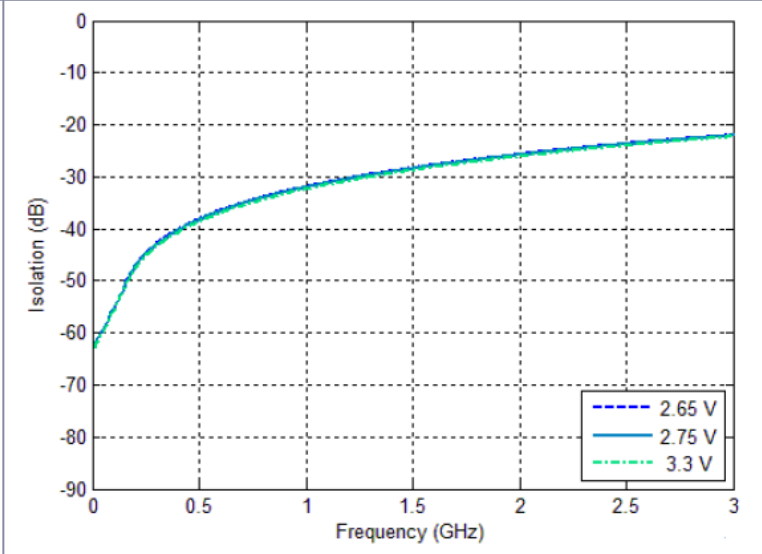


Figure 9. Isolation vs.  $V_{DD}$  (RFC-RFx)

## Evaluation kit

pSemi designed the SP4T switch evaluation board to ease your evaluation of the pSemi PE423641. The RF common port is connected through a 50Ω transmission line via the top SMA connector, J1. RF1, RF2, RF3, and RF4 are connected through 50Ω transmission lines via SMA connectors J3, J5, J2 and J4, respectively. A through 50Ω transmission is available via SMA connectors J6 and J7. This transmission line can be used to estimate the loss of the PCB over the environmental conditions being evaluated.

The board is constructed of a four-layer metal FR4 material with a total thickness of 62 mils. The middle layers provide ground for the transmission lines. The transmission lines were designed using a coplanar waveguide with a ground plane model using a trace width of 32 mils, trace gaps of 25 mils, and a metal thickness of 2.1 mils.

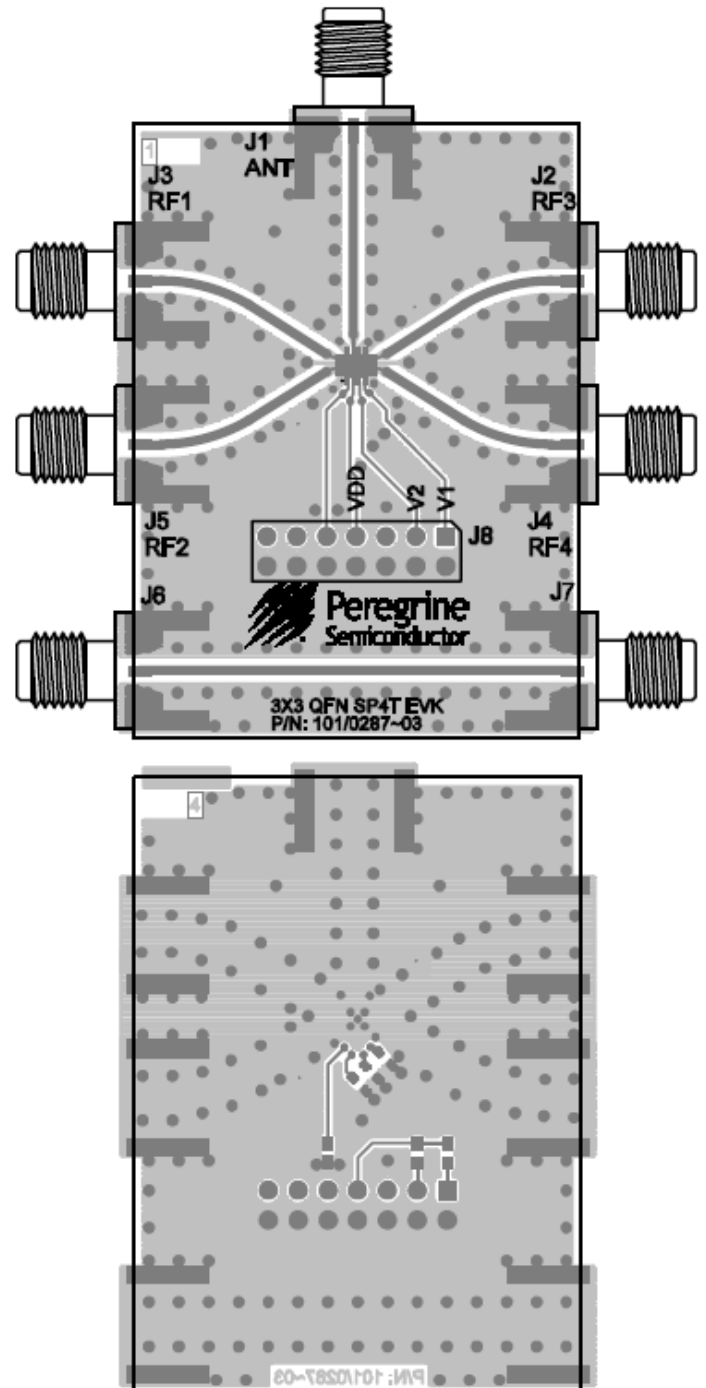

PRT-50900

Figure 10. Evaluation board layouts

Evaluation board schematic

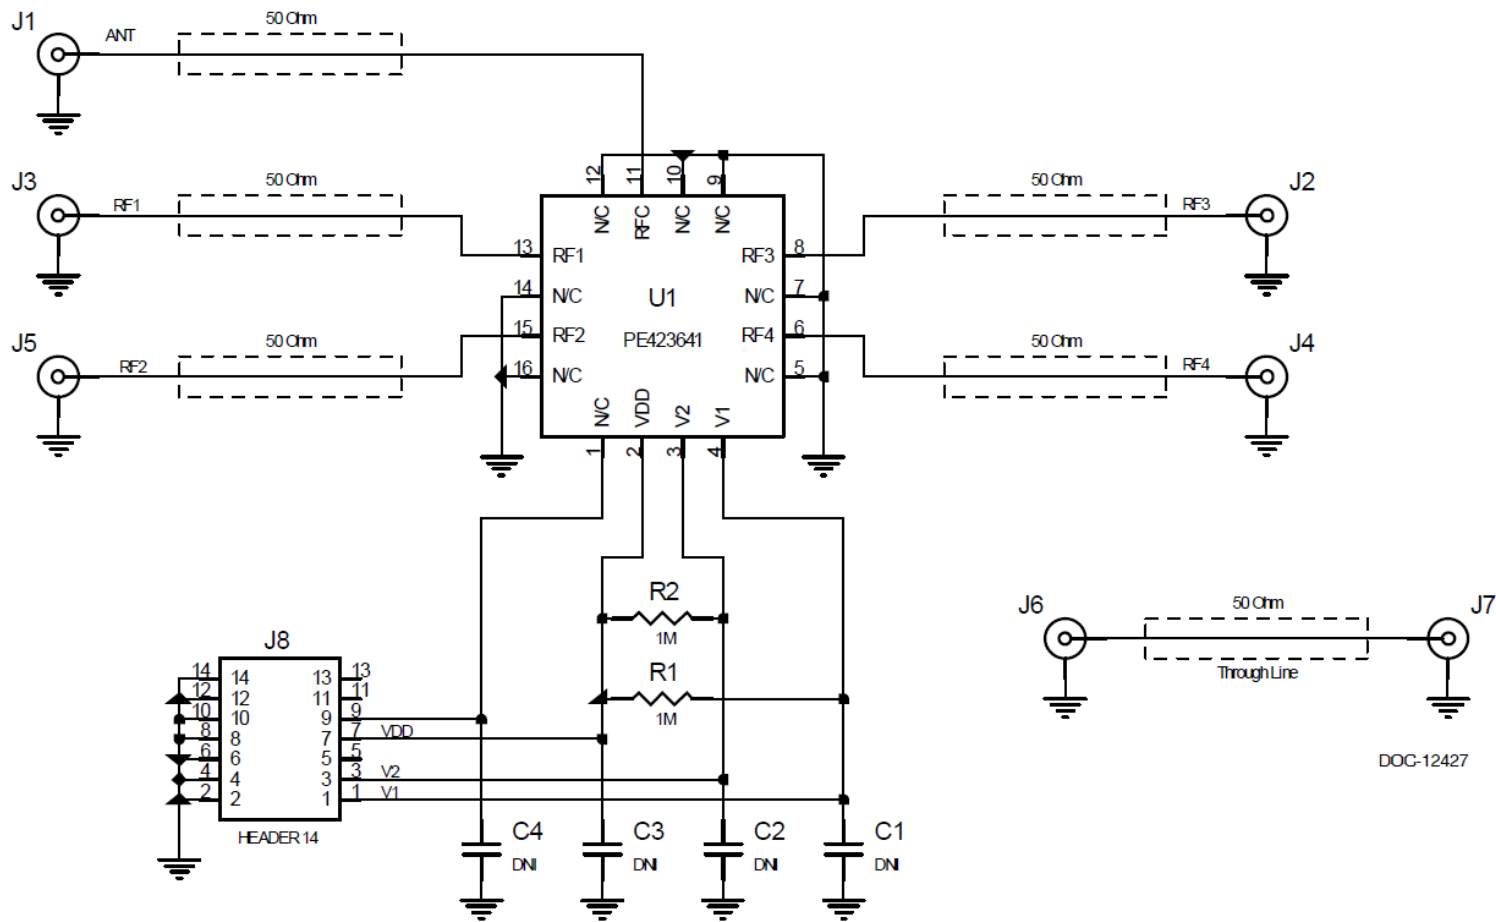


Figure 11. Evaluation board schematic

## Pin information

Figure 12 shows the PE423641 pin map for the 16-lead 3 × 3 mm QFN package, and Table 6 lists the description for each pin.

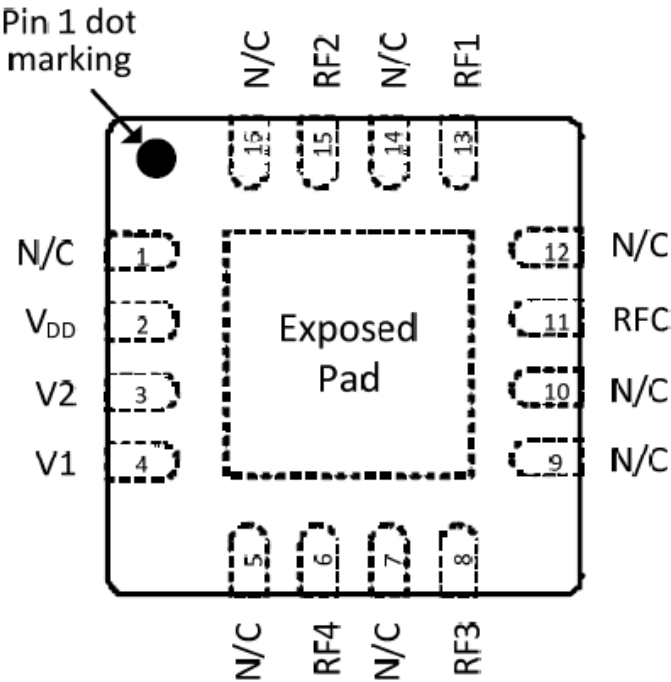


Figure 12. Pin configuration (top view)

Table 6. PE423641 pin descriptions

Pin no.	Pin name	Description
1, 5, 7, 9, 10, 12, 14, 16	N/C	No connect
2	V <sub>DD</sub>	Supply voltage
3	V2	Digital control logic input 2
4	V1	Digital control logic input 1
6 <sup>(*)</sup>	RF4	RF port 4
8 <sup>(*)</sup>	RF3	RF port 3
11 <sup>(*)</sup>	RFC	RF common
13 <sup>(*)</sup>	RF1	RF port 1
15 <sup>(*)</sup>	RF2	RF port 2
Pad	GND	Exposed pad. Ground for proper operation.

**i** \* RF pins 6, 8, 11, 13, and 15 must be at 0 VDC. These RF pins do not require DC blocking capacitors for proper operation if the 0 VDC requirement is met.

## Packaging information

This section provides the following packaging data:

- Moisture sensitivity level
- Package marking
- Package drawing
- Tape-and-reel information

### Moisture sensitivity level

The PE423641 moisture sensitivity level rating for the 16-lead 3 × 3 mm QFN package is MSL1.

### Package drawing

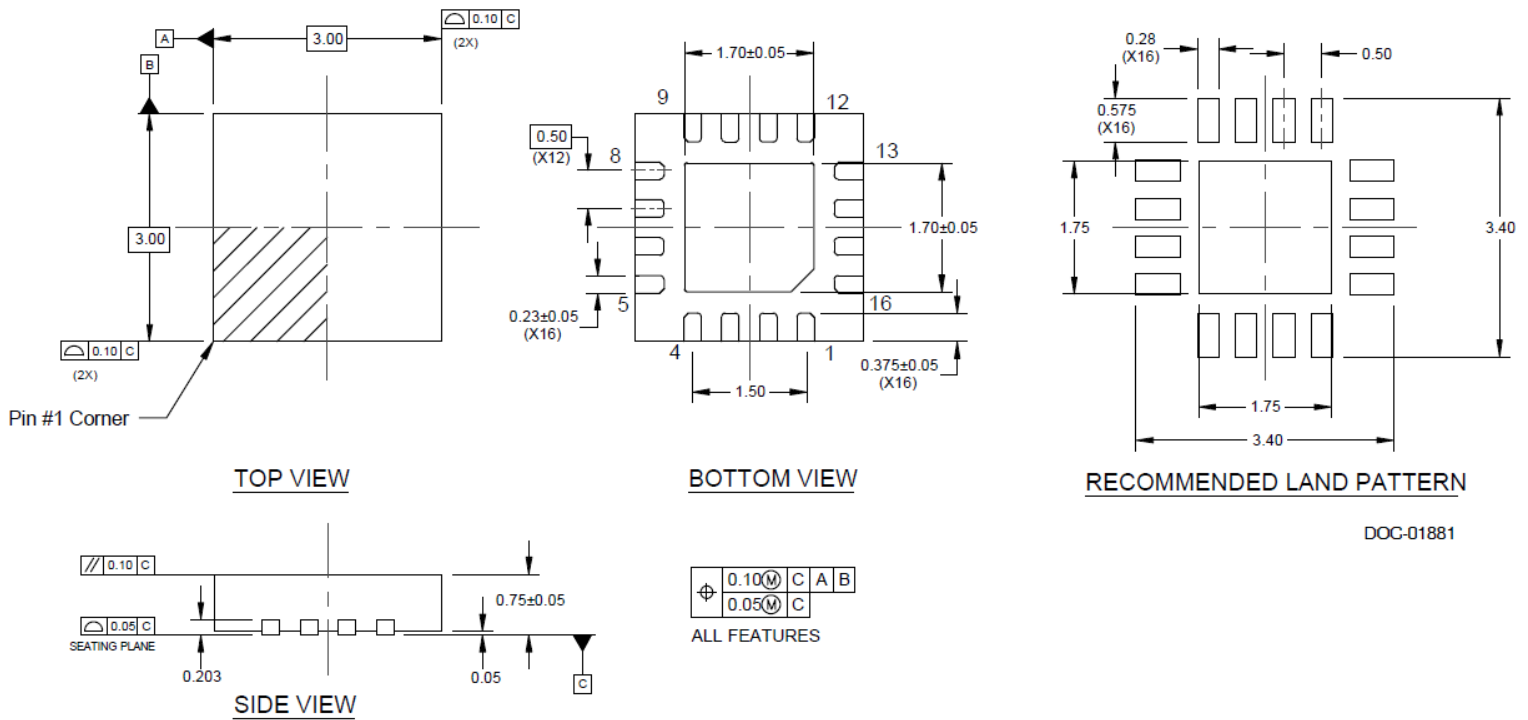


Figure 13. Package mechanical drawing for the 16-lead 3 × 3 mm QFN package

## Top-marking specification



DOC-51207

● = Pin 1 designator

YYWW = Date code, last two digits of the year and work week

ZZZZZZ = Last six characters of the assembly lot code

Figure 14. PE423641 package marking specification

## Tape and reel specification

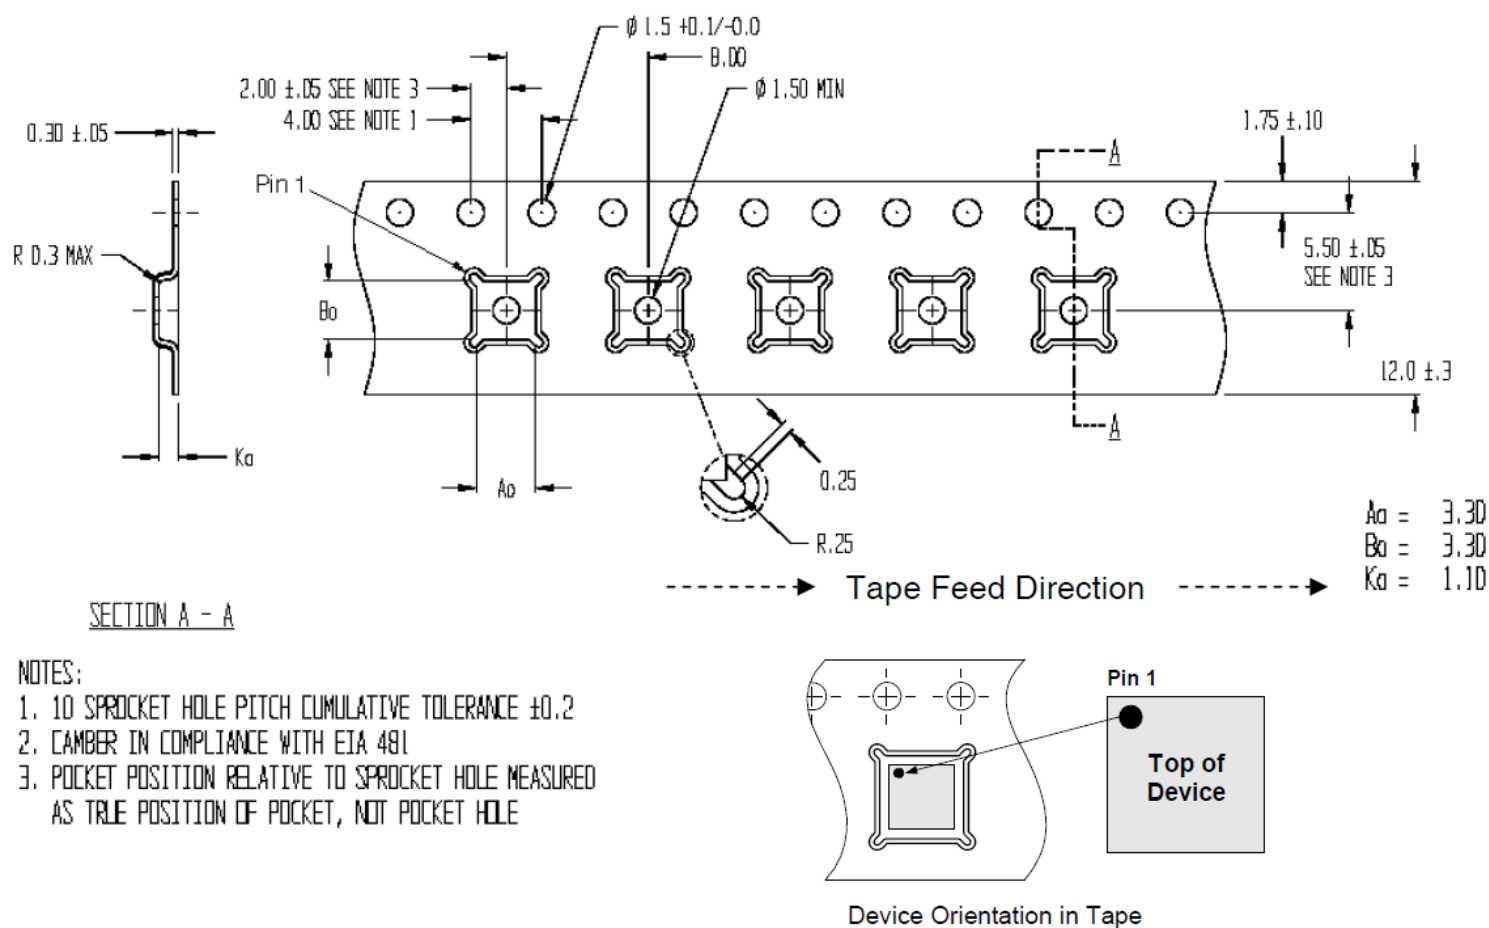


Figure 15. Tape and reel specification for the 16-lead 3 × 3 mm QFN package

### Notes:

- The diagram is not drawn to scale.
- The units are in millimeters (mm).
- The maximum cavity angle is five degrees.
- The bumped die are oriented active side down.



## Ordering information

Table 7. PE423641 ordering codes and shipping methods

Order code	Description	Packaging	Shipping method
PE423641MLZZ-Z	PE423641 SP4T RF Switch	Green 16-lead 3 × 3 mm QFN	3000 units/T&R
EK423641-01	PE423641 evaluation kit	Evaluation kit	1/box

## Document categories

<b>Advance Information</b>	The product is in a formative or design stage. The data sheet contains design target specifications for product development. Specifications and features may change in any manner without notice.
<b>Preliminary Specification</b>	The data sheet contains preliminary data. Additional data may be added at a later date. pSemi reserves the right to change specifications at any time without notice to supply the best possible product.
<b>Product Specification</b>	The data sheet contains final data. In the event that pSemi decides to change the specifications, pSemi will notify customers of the intended changes by issuing a Customer Notification Form (CNF).
<b>Product Brief</b>	This document contains a shortened version of the data sheet. For the full data sheet, contact <a href="mailto:sales@psemi.com">sales@psemi.com</a> .

## Contact and legal information

<b>Sales contact</b>	For additional information, contact Sales at <a href="mailto:sales@psemi.com">sales@psemi.com</a> .
<b>Disclaimers</b>	The information in this document is believed to be reliable. However, pSemi assumes no liability for the use of this information. Use shall be entirely at the user's own risk. No patent rights or licenses to any circuits described in this document are implied or granted to any third party. pSemi's products are not designed or intended for use in devices or systems intended for surgical implant, or in other applications intended to support or sustain life, or in any application in which the failure of the pSemi product could create a situation in which personal injury or death might occur. pSemi assumes no liability for damages, including consequential or incidental damages, arising out of the use of its products in such applications.
<b>Patent statement</b>	pSemi products are protected under one or more of the following U.S. patents: <a href="http://patents.psemi.com">http://patents.psemi.com</a>

## Copyright and trademarks

©2013–2025, pSemi Corporation. All rights reserved. The Peregrine Semiconductor name, Peregrine Semiconductor logo and UltraCMOS are registered trademarks and the pSemi name, pSemi logo, HaRP, and DuNE are trademarks of pSemi Corporation in the U.S. and other countries.